


Type : V & A

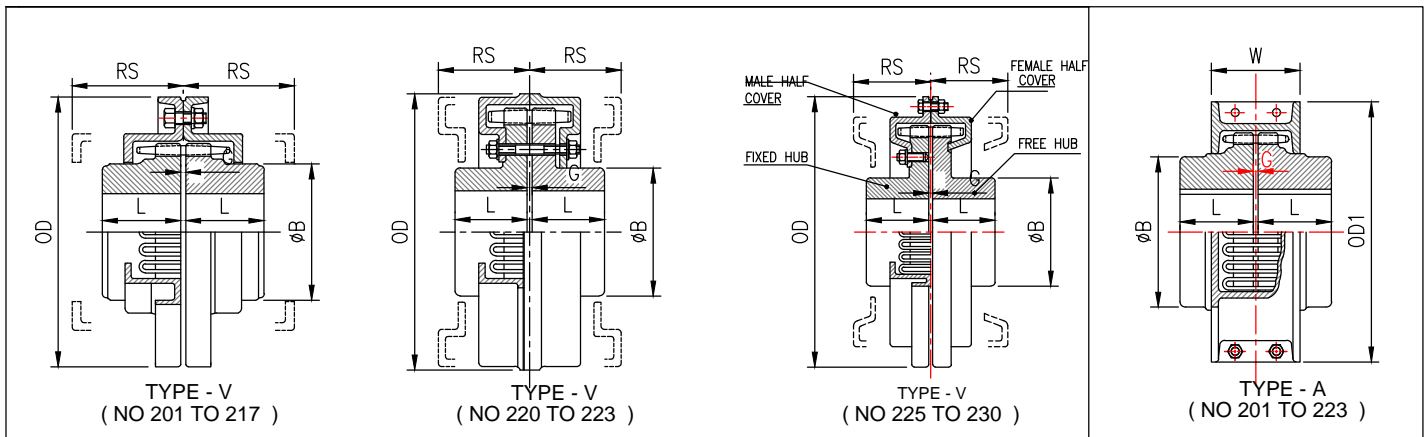

Type : V : VERTICALLY SPLIT COVER.

Type : A : AXIALLY SPLIT COVER.

DIMENSIONS AND ENGINEERING DATA FOR RESILIENT COUPLING

SIZE	COUPLING HP/RPM	RATING TORQUE KG-M	MAX SPEED RPM	WT IN KG	BORE		DIMENSIONS						
					MAX BORE	PILOT BORE	OD (MM)	OD1(MM) <small>for axially split cover</small>	L (length of Hub)	G (Gap)	B (HUB DIA)	RS	W
201	0.006	4.3	5800	3	29	10	105	104	38	0.8	45	52	57
202	0.010	7.2	5200	4	38	12	120	120	38	0.8	59	55	64.5
203	0.020	14.4	4600	5	42	16	144	127	45	0.8	62	65	64.5
204	0.030	21.6	3600	8	58	16	172	159	51	0.8	87	65	66
206	0.045	32.2	3300	12	55	16	190	178	51	0.8	84	80	84.5
207	0.065	46.6	3100	17	65	16	197	190	57	0.8	97	80	85
208	0.095	68.2	2750	20	80	25	222	222	64	0.8	119	80	86.5
209	0.125	89.8	2400	27	95	25	254	244	70	0.8	143	80	86.5
210	0.185	132.5	2000	42	110	25	276	267	89	1.6	165	80	86.5
211	0.355	254.4	1900	54	105	38	295	276	102	1.6	156	130	138
213	0.455	325.4	1800	65	125	50	324	324	102	1.6	187	150	157
214	0.655	468.5	1600	75	125	50	336	336	102	1.6	184	150	157
215	0.905	648.0	1400	105	150	50	375	381	114	1.6	222	150	159
217	1.255	897.6	1200	150	170	50	425	425	127	1.6	254	150	159
220	2.405	1722.25	1100	180	160*	75	432	502	140	3.2	237	180	160
223	3.505	2510.42	1100	220	175*	85	492	552	152	3.2	260	180	180
225	5.55	3975.25	1200	410	205	110	686		178	3.2	285	215	180
226	7.55	5407.02	1050	550	230	125	781		203	3.2	324	215	
227	10.55	7555.0	900	875	260	140	876		228	6.4	368	255	
228	17.55	12570.0	750	1200	290	150	1016		228	6.4	406	255	
229	21.00	15045.0	750	1500	320	165	1003		280	6.4	450	335	
230	27.00	19345.0	650	2000	350	165	1150		305	6.4	495	335	

For axially split cover safe speed is 70% of the above figures. > Consult for Higher Speed. > All Dimension are in MM
 Dimension D for A Type BRC 220 = 302 mm and BRC 223 = 349 mm ** Max Bore for A type BRC 220 = 200 mm For BRC 223 = 235